


**Product indicated for indoor areas.**

1° - Mount the product passing the Light Socket wire through the dome hole, Rod, Rubber O-Ring, and the Finishing Bushing. Pay attention to don't remove the tape before passing the wire through the Rubber O-Ring to avoid fraying the wire.



- 2° - Put the Rubber O-ring inside the Rod to Hide it,
- 3° - Fix the support on the ceiling,
- 4° - Adjust the height using the Suspension Lamp Regulator. Max cable dimension: 118.10 inch.
- 5° - Connect it to the Electrical network, so fix the canopy using the finishing bushing.

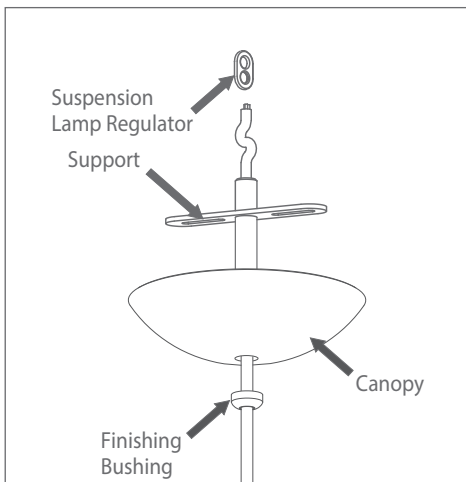

6° - Insert the lamp and enjoy it.

**ML-2100** Ø13 3/4" x 7 7/8" E26 120/277V  
**ML-2101** Ø19 5/8" x 15 1/4" E26 120/277V

**Power Max:**12W **Weight:** 2.13 lbs  
**Power Max:**12W **Weight:** 3.96 lbs

Product indicated for indoor areas.

**Attention**

Follow the instructions to ensure proper and safe operation. We recommend that the installation be done by a qualified professional. Recessed ceiling installation requires rigid support point attachment and special installations require special attachment.

**Important**

Lamps, transformers, and reactors are not included with the product except as noted. Failure to follow the instructions in the manual could result in accidents and loss of warranty. Do not adjust springs and brackets unless otherwise indicated.  
 Warranty: 1 year for product and 5 years for Led and Driver.

**Cleaning and Maintenance**

Before any action turn off the electric current. Clean only with water dampened flannel, never use chemicals or abrasives. The materials that make up the product are non-toxic.